


# Assembly Instructions for Handy-Cart

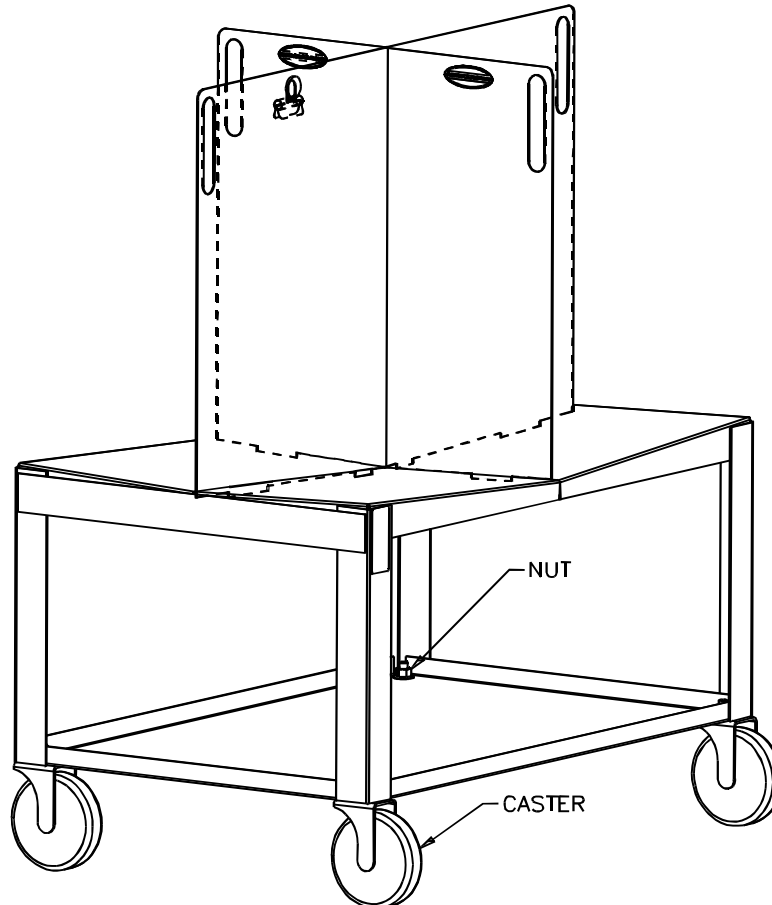

## Instructions:

1. After the cart is removed from its box, lay it on its side.
2. Remove four casters and four nuts from their bag.
3. For each caster, place the stud through the hole in the bottom shelf of the cart as shown in the above diagram.
4. Screw the nut onto the caster with the flange against the cart. Tighten the nut. Repeat for the remaining three casters.
5. Remove the magnetic bulldog clip from the bag and place on the cart. The clip may be used for holding work orders.
6. Discard packing items.